
EDM Support, Inc www.edmcorner.com


AMS M350 – Final config. Disk (686204.9) installation instructions. FW13.04

Only press keys when the instructions tell you to. Some operations take a few minutes to execute. Pressing buttons at the incorrect time could change the loading procedure and cause failure of the loading process.

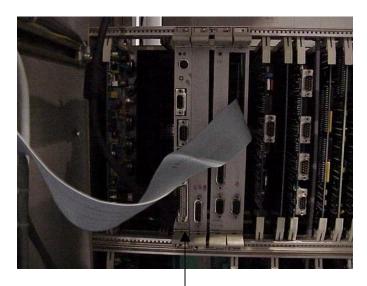


Turn off machine.

Remove the KSP-M45 circuit board (located on the left) The board next to it must be removed at the same time because there is a small ribbon cable connected to it. The battery (round capacitor) must be discharged to reload the final config disk.

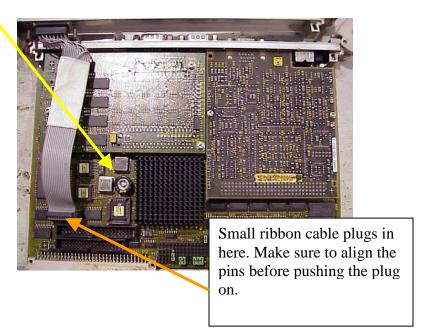

Short out the capacitor with a piece of wire for 1 minute to completely erase the memory on the board

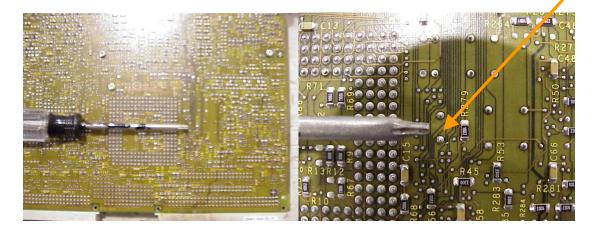

Install the KSP-M45 and the small plate next to it into the machine. Make sure that the small ribbon cable plug is securely fastened and does not catch on the board next to it. This small ribbon cable and plug are for the keyboard.

Insert the Final config disk into the A: drive. Connect the floppy drive cable onto the AMS-M350 board with the ribbon cable coming out through the rectangular hole and insert the board. Connect all connections.

Turn on the machine. The screens should look similar to these and follow the same sequence. There could be slight differences because I could not take the picture fast enough.


1st Screen



2nd Screen



Push F1

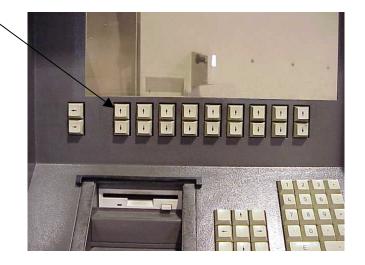

3rd Screen



4th Screen



5th Screen



Press the "Y" button on the keyboard

6th Screen



7th Screen



8th Screen



9th Screen



Remove the Final config disk from the A drive. Turn off the machine and wait 1 minute then turn the machine back on and when completed it should come up correctly.

EDM Support, Inc.
701 Thorsen Lane
Batavia, IL. 60510
Web Site - www.edmcorner.com
E-mail - edmsupport@aol.com or larry@edmcorner.com